




400Hz STATIC FREQUENCY CONVERTERS

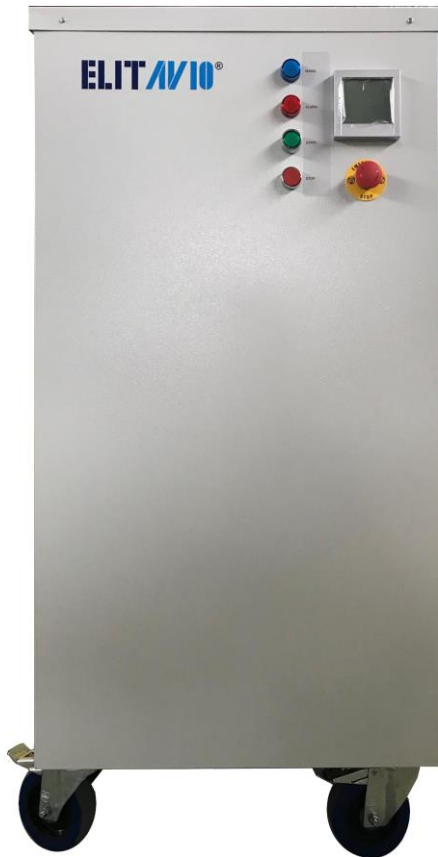

ELIT Srl designs and manufactures 400Hz static frequency converters since 1987.

To complete the airfield range of products are available 28Vdc and 270Vdc power supplies, constant current regulating units (CCR) for ground lighting and control systems for commercial and military airports. All the equipment is distinguished by the use of technologically advanced components, reliability, and ease of maintenance.

PRINCIPLES OF WORKING

The unit converts the input voltage at 50 / 60Hz to an output voltage (galvanically isolated from the input) at 400Hz; The output voltage is stabilized in voltage, frequency with quartz and low harmonic voltage.

The magnitude of the rectifier depends on the harmonic current that the network (THDi) is able to withstand: For strong networks (> 10Pn) THDi can be 25%, while for medium or weak networks THDi must be 10% up to 3%. The full-load cosphi varies from 0.95 to 0.98 depending on the chosen input magnetic configuration. The PWM modulated IGBT inverter supplies the voltage adaptation transformer, its output is fitted with a filter to contain the distortion within 2%

FEATURES

- Galvanic input / output isolation
- Three-phase input voltage without neutral.
- High performance.
- High overload capacity.
- Analyzer with 128x112 pixel graphic LCD, touch-screen, harmonic analysis.
- Automatic voltage compensation (DLC) optional.
- Remote Point of Reaction (POR) (optional).
- Interlock with bypass option (optional).
- Remote control (optional).
- Emergency Power Off.
- UPS mode with battery (optional)
- 28Vcc additional module (optional)
- Power history (optional)
- RS485, RS232, SNMP and I / O communication interface (optional)

CONTROL PANEL

The converter is equipped with a backlit liquid crystal display, optional touch screen. The display is divided into four menus, accessible with the corresponding function keys.



The main measures are:

voltage (phase voltage, phase-to-neutral and neutral-ground), main voltage (only for DC power supply), phase current, neutral current calculated and real power (active, reactive and apparent phase and total) P.F. (Power factor of each phase and total), Cos ϕ of each phase and total frequency (frequency measurement of the voltage measured), asymmetry of voltage and current, total harmonic distortion (THD) of voltages and currents, analysis of voltage and current up to the 63rd harmonic function max. (HIGH) and the min. (LOW) for the acquisition and storage of the instantaneous values of voltage, current, power, PF, Con. and frequency averaging function peak values (maximum demand) power and current flow direction of the power harmonics energy meters for active, reactive, apparent (partial and total functions with programmable tariff) counter (total and partial programmable) texts in 5 languages (Italian, English, French, Spanish and Portuguese).

accuracy for IEC / EN 50470-3 (MID Class B).

Signaling:

- mains presence
- converter running
- alarm.

SWITCHES AND OPERATOR CONTROLS

The static frequency converters FC400 are provided with the following protections and controls:

- Input switch isolator with door lock
- Output switch isolator (optional output contactor)
- START / STOP converter buttons
- ON / OFF output buttons (optional)
- Local or Remote control selector (optional)
- ON / BYPASS interlock selector (optional)
- Voltage drop compensation max 8% (optional)
- LCD touchscreen display (optional)
- Remote command ON / OFF converter (optional)
- Optional interfaces SNMP, RS485, RS232, USB

STANDARDS

CE Compliant.

MIL STD 704F: Aircraft Electric Power Characteristics.

ISO 6858: Ground support electrical supplies.

EN 2282: Characteristics of aircraft electrical supplies, General requirements.

EN 61000-6-2: Electromagnetic compatibility Emission.

EN 61000-6-4: Electromagnetic compatibility Immunity.

EN 13849-1: Safety of machinery - Safety-related parts of control systems.

DFS400 Specification for 400 Hz aircraft power.

BS 2G 219: General requirements for ground support equipment.

SAE ARP 5015: Ground equipment 400 Hz ground power performance requirement.

CUSTOM VERSIONS

Custom configurations and features are provided on request:

- Version with anti-vibration and / or customized dimensions,
- PCB tropicalization treatment,
- Additional output power module 28Vdc 200A – 400A – 600A – 800A,
- Customized voltages and frequencies.



Model	FC400 5	FC400 10	FC400 15	FC400 20
Rated power	5kVA/4.5kW	10kVA/9kW	15kVA/13.5kW	20kVA/18kW

INPUT

Nominal voltage	400V 3Ph (208V, 440V 480V and 575V on request)			
Voltage tolerance	+10% -15%			
Power factor	0.95 at full load (0.98 on request)			
Nominal frequency	50Hz/60Hz ±5%			
Current distortion THDI	<25% standard (<10% o <3% opzionale)			
Inrush current	Absent			
Input current @ full load	7.5 A	15 A	22 A	30 A

OUTPUT

Voltage	200V 3Ph+N (115V, 440V, 480V and 575V on request)			
Frequency	400Hz ± 0.01%			
Power factor	Inductive - capacitive			
Waveform	Sinusoidal			
THD	<3% with linear load (2% on request)			
Static stability	±1%			
Dynamic stability	±8%			
Recovery time	10 msec.			
Overload 10 min.	1.25 In			
Overload 1 min.	1.5 In			
Overload 30 sec.	2 In (on request)			
Overload 10 sec.	3 In (on request)			
Overload 1 sec.	4 In (on request)			
Crest factor	1.414 ±3%			
Voltage modulation	<1%			
Voltage phase shift	±1° el. with balance load ±2° el. with 30% unbalance load			

BATTERY (OPTIONAL)

Nominal voltage	408Vdc
Floating voltage	456Vdc
Minimum voltage	340Vdc

MISCELLANEOUS

Dimensions	600x950x1200mm or 850x800x1100mm			
Weight	100kgs	120kgs	180kgs	250kgs
Efficiency	>90%			
Operating temperature	from -10°C to +45°C (-20°C/+55°C -40°C/+60°C on request)			
Relative humidity	from 0 to 95% without condensing			
Altitude	1000m above sea level without derating			
Protection degree	IP 20 (IP31, IP41, IP44, IP54, IP60 on request)			
Cooling	Forced air			

Modello	FC400 25	FC400 30	FC400 40	FC400 45
Rated power	25kVA/22.5kW	30kVA/27kW	40kVA/36kW	45kVA/40.5kW

INPUT				
Nominal voltage	400V 3Ph (208V, 440V 480V and 575V on request)			
Voltage tolerance	+10% -15%			
Power factor	0.95 at full load (0.98 on request)			
Nominal frequency	50Hz/60Hz ±5%			
Current distortion THDI	<25% standard (<10% o <3% opzionale)			
Inrush current	Absent			
Input current @ full load	37 A	45 A	60 A	67 A

OUTPUT	
Voltage	200V 3Ph+N (115V, 440V, 480V and 575V on request)
Frequency	400Hz ± 0.01%
Power factor	Inductive – capacitive
Waveform	Sinusoidal
THD	<3% with linear load (2% on request)
Static stability	±1%
Dynamic stability	±8%
Recovery time	10 msec.
Overload 10 min.	1.25 In
Overload 1 min.	1.5 In
Overload 30 sec.	2 In (on request)
Overload 10 sec.	3 In (on request)
Overload 1 sec.	4 In (on request)
Crest factor	1.414 ±3%
Voltage modulation	<1%
Voltage phase shift	±1° el. with balance load ±2° el. with 30% unbalance load

BATTERY (OPTIONAL)	
Nominal voltage	408Vdc
Floating voltage	456Vdc
Minimum voltage	340Vdc

MISCELLANEOUS				
Dimensions	600x950x1200mm or 850x800x1600mm			
Weight	270kgs	300kgs	350kgs	400kgs
Efficiency	>90%			
Operating temperature	from -10°C to +45°C (-20°C/+55°C -40°C/+60°C on request)			
Relative humidity	from 0 to 95% without condensing			
Altitude	1000m above sea level without derating			
Protection degree	IP 20 (IP31, IP41, IP44, IP54, IP60 on request)			
Cooling	Forced air			

ELIT Srl reserves his right to do modifications to his products without notice.